




General Characteristics

| | |
|----------------|-----------------------|
| Voltage | 415V |
| Amp. | 16A |
| Poles | 3P+E |
| K_cable Ø | 6-15mm |
| Contact Screws | 100 |
| Wire Flexible | 1-2.5 mm ² |
| SW | 42mm |
| IP Rating | IP44 |
| Weight | 161g |
| Dimensions | 138x82mm |

Technical Drawing

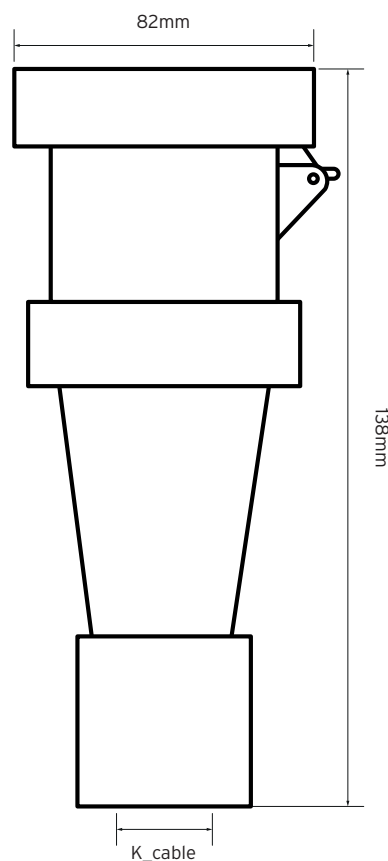

Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.