

## PANEL COMPONENTS

### CRANE PENDANT STATION CPSS-5


**5 button crane pendant pushbutton station made from reinforced ABS plastic for strength and rigidity. Control buttons are mechanically interlocked. Single speed contact operation. Internal channelling makes wiring easier. Strain relief glanding**



#### General Characteristics

Standards	BS EN 60947-5-1
Overall depth	350mm
Body depth	254mm
Maximum width	75mm
Maximum height	80mm
Degree of protection	IP65
Contacts	4A/230VAC
Contact material	AgNi
Mechanical life	>1M operations
Mechanical operating frequency	900 on/off per hour
Electrical life	>100K operations
Electrical operating frequency	900 on/off per hour
Insulation voltage $U_i$	300V
Impulse withstand voltage $U_{imp}$	2500V
Dielectric strength body-contact	2500 VAC
Dielectric strength contact-contact	1500 VAC
Operating temperature	-15°C to +80°C

#### Technical Drawing

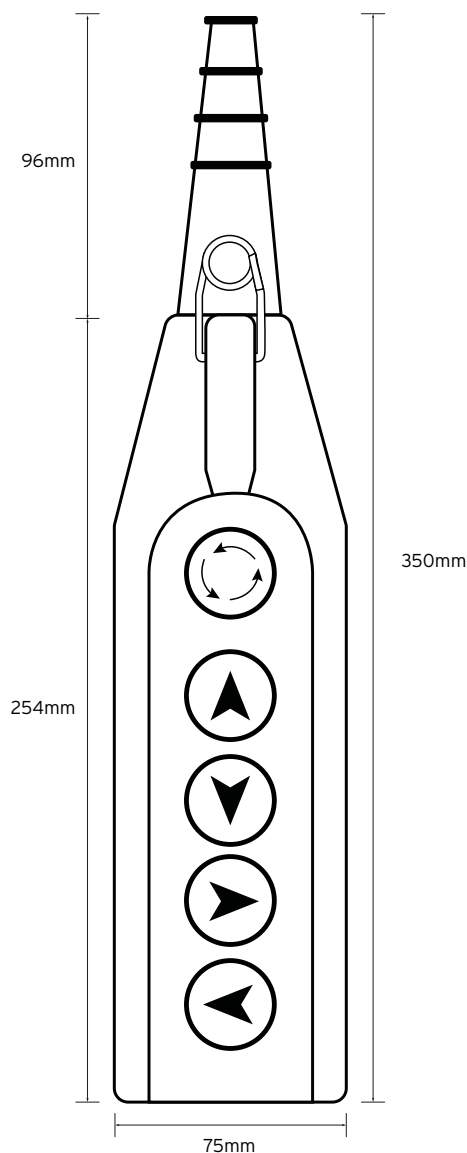

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.