


PANEL COMPONENTS

JOYSTICK CONTROLLER JS4POS-S

Joy stick controller with 4 position control. Fireproof plastic contact blocks. 22mm panel mounting. Metallic housing with neoprene shroud.

Technical Drawing

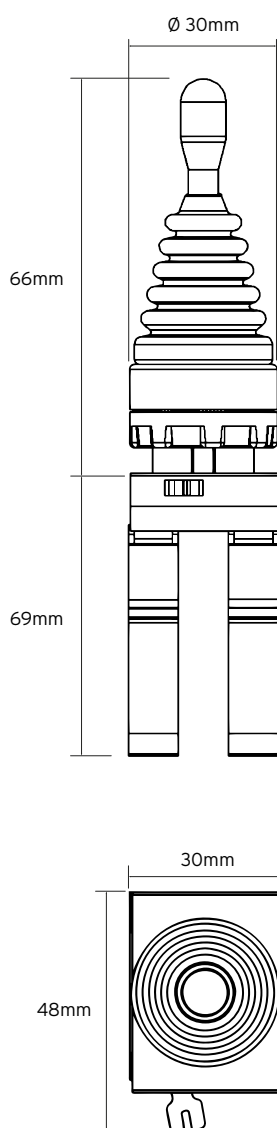

General Characteristics

Standard	BSEN 60947-5-1
Contact configuration	4 NO
Switching operation	Spring Return
Rated current Ie	4A
Ingress protection	IP65
Rated voltage Ui	300V
Dielectric strength	1500 VAC
Mechanical life	500,000 ops
Electrical life	100,000 ops
Terminal Capacity	up to 2.5mm ²
Contact tightening torque	0.8 Nm
Overall height	135mm
Height above panel	66mm
Width	40mm
Depth	40mm
Operating temperature	.-5°C to +40°C
Weight	0.18Kg

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.