
NiGLON Circuit **Protection**

M3CU10 Isolator Controlled Consumer Unit-Left Hand Incomer

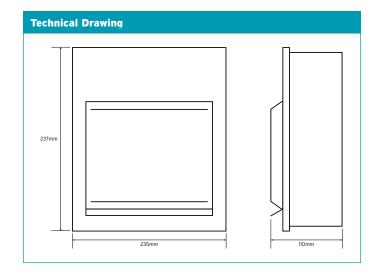

NIGLON

Technical Specifications	
Material Composition	Steel (Powder Coated)
Paint Colour	RAL 9010
Configurations	10 Module 8 Free Ways 100A DP Isolator
Rated Operational Voltage (Un/Ue)	230V AC
Rated Current of Assembly (InA)	100A
Rated Frquency	50Hz
Main Switch Terminal Capacity	35mm ²
IP Rating (Ingress Protection)	IP20
IK Rating (Impact Protection)	IK05
Dimensions	237 (H) x 235 (W) x 110mm (D)
Standards	BS7671:2018, BS EN61439-3
100A Mains Isolator Manufactured to	EN60947:3
Certification	Semko, CE, UKCA

NiGLON

All specifications are SEMKO Certified



0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk