


nigLON

Circuit Protection

M3CU16SP Isolator Controlled (SPD inc.)



Technical Drawing

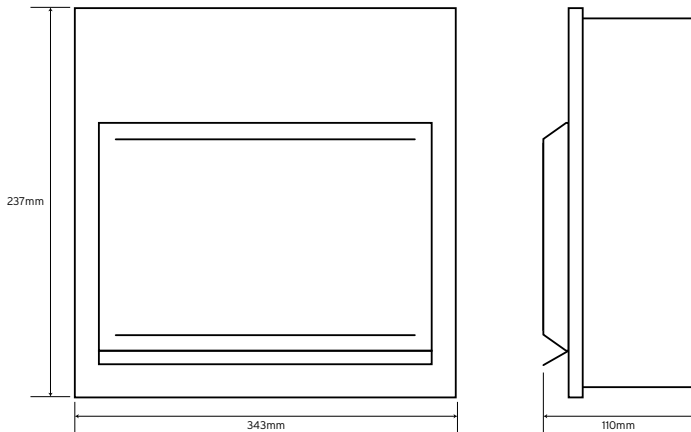

Technical Specifications

| | |
|--|--|
| Material Composition | Steel (Powder Coated) |
| Paint Colour | RAL 9010 |
| Configurations | 16 module 12 way 100A DP Isolator + SPD |
| Rated Operational Voltage (Un/Ue) | 230V AC |
| Rated Current of Assembly (InA) | 100A |
| Rated Frequency | 50Hz |
| Max. Incoming Cable Size | 35mm ² |
| Surge Protection Device | Type 2 (or 3) 15kA : BS EN 61643-11 |
| Miniature Circuit Breaker (MCB) | Manufactured to BS EN 60898 |
| IK Rating (Impact Protection) | IK05 |
| IP Rating (Ingress Protection) | IP20 |
| Standards | BS7671:2018, BS EN61439-3 |
| Certification | Semko, Kema Keur, CSA, UR, EAC, CE, UKCA, Intertek |
| Dimensions | 343mm W x 237mm H x 110mm D |

All specifications are Intertek Certified
Surge protection device included 15kA I_{max}