
NiGLON Circuit **Protection**

M3CU8/80-A RCD Controlled Consumer Unit

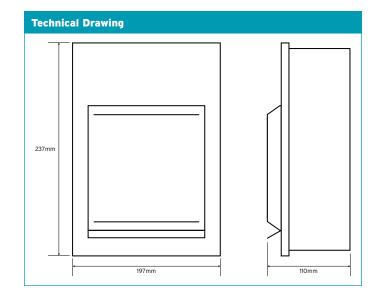

NIGLON

NIGLO

Technical Specifications	
Material Composition	Steel (Powder Coated)
Paint Colour	RAL 9010
Configurations	8 Module 6 Free Ways
RCD	80A-30mA : BS EN61008-1
RCD Type	Туре "А"
RCD Terminal Capacity	35mm ²
Rated Operational Voltage (Un/Ue)	230V AC
Rated Current of Assembly (InA)	80A
Rated Frquency	50Hz
IP Rating (Ingress Protection)	IP20
IK Rating (Impact Protection)	IK05
Dimensions	237 (H) x 197 (W) x 110mm (D)
Standards	BS7671:2018, BS EN61439-3
Certification	Semko, CE, UKCA

NiGLON

All specifications are SEMKO Certified

ESOE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. 0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk