



## MOTOR CONTROL GEAR MINI CONTACTOR ACCESSORY AUXILIARY CONTACTS FRONT MOUNTING

AUX2FM-MINI, AUX1/1FM-MINI, AUX4FM-MINI,  
AUX1/3FM-MINI, AUX2/2FM-MINI, AUX3/1FM-MINI,  
AUX4OFM-MINI,



Auxilliary Contacts provide 10A AC1 additional signalling function, in combinations of normally open and normally closed contacts. Top mount devices clip onto concators; side mount are screw fixed

### Technical Drawing ( Front Mounting )

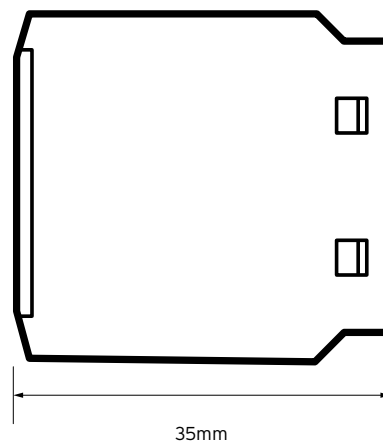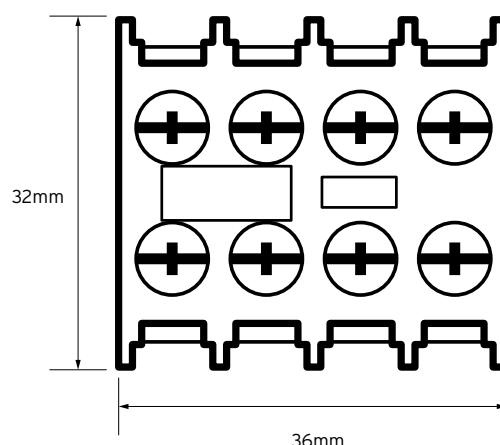


### General Characteristics

Standards	IEC 60947-4, UL-508
Overall Depth when Mounted	93.4mm
Rated Operational Voltage (Ue)	≥ 690V
AC-1 Rated Current	16A
Terminal Capacity	up to 1.5mm <sup>2</sup>
Tightening Torque	0.7 Nm
Weight 2 pole	0.02Kg
Weight 4 pole	0.03Kg

### Available Contact Arrangements

AUX0/2FM-MINI	Auxilliary Contact 2NC
AUX1/1FM-MINI	Auxilliary Contact 1NO/1NC
AUX0/4FM-MINI	Auxilliary Contact 4NC
AUX1/3FM-MINI	Auxilliary Contact 1NO/3NC
AUX2/2FM-MINI	Auxilliary Contact 2NO/2NC
AUX3/1FM-MINI	Auxilliary Contact 3NO/1NC
AUX4/OFM-MINI	Auxilliary Contact 4NO

### Wiring Diagram



### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.