

niglon

Circuit Protection

NFK1 Miniature Fuse Kit




Contents:

BS 1362 Plug Top Fuses:
3A, 5A & 13A


Quick Acting Fuses:
500mA, 1A, 2A, 3.15A, 4A & 6.3A

Time Delay Fuses:
315mA, 500mA, 630mA, 800mA,
1A, 1.25A, 1.6A, 2A & 3.15A


Plug Top Fuse Technical Drawing

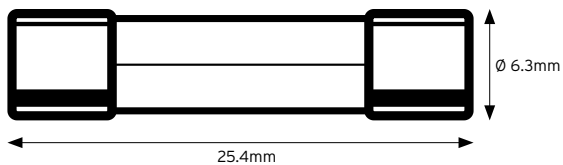

Quick Acting Fuse Technical Drawing

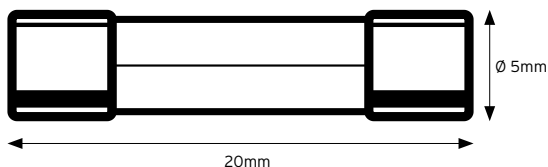

Time Delay Fuse Technical Drawing

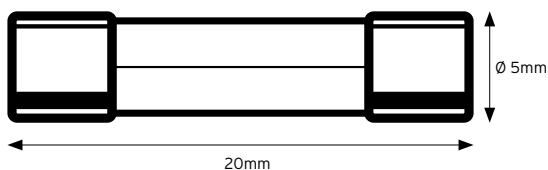

BS 1362 Plug Top Fuses Technical Specifications

Standard of Compliance	BS 1362
Quantity	10 of each type
Certified	
Size	25.4 x Ø 6.3mm

Maximum Earth Fault Loop Impedance (Zs)

Amp	Zs (Ohm)	
	Disconnection Time	
	0.4s	5s
3A	22.1	39.4
5A	11.5	21.12
13A	4.4	7.4

Remarks:

- 1). For TN system
- 2) Voltage to earth (U₀) equals to 230VAC

Quick Acting Fuse Technical Specifications

Standard of Compliance	BS EN 60127/2
Quantity	10 of each type
Certified	(where applicable)
Size	20 x Ø 5mm

Time Delay Fuse Technical Specifications

Standard of Compliance	BS EN 60127/2
Quantity	10 of each type
Certified	(where applicable)
Size	20 x Ø 5mm