

ENCLOSURES

GRP GLAZED DOOR ENCLOSURE PG806030

Wall mounting polyester enclosure with glazed door intended for outdoor use. Standard RAL7035 colour. High resistance to harsh weather conditions, corrosion and impact. Easily machinable.




General Characteristics

| | |
|-------------------------------------|-------------------------------------|
| Standards | BSEN 62208, BSEN 62262 & BSEN 60529 |
| Material | Polyester |
| Flame test | 960°C Glow Wire |
| Ingress Protection | IP66 / IK8 |
| Height | 500mm |
| Width | 400mm |
| Depth | 200mm |
| Useable depth with backplate fitted | 173mm |
| Window Size (width x height) | 221x381mm |
| Number of Locks | 2 |
| Operating Temperature | -30°C to +105°C |
| Thermal Class | A |
| Rated Voltage | 1000V |
| Weight | 5.5 Kg |

Available Accessories

| | |
|--------------------------------|--------|
| Document Pocket | A4DOCW |
| Polyester Backplate 458x360mm | PBP542 |
| Metal Backplate 458x360mm | MBP542 |
| Small Ventilation Device | P-SVD |
| Large Ventilation Device | P-LVD |
| Key Lock with Butterfly Handle | P-DL |
| Padlock Hasp | P-PH |
| Wall Fixing Kit | P-WFK |

Technical Drawing

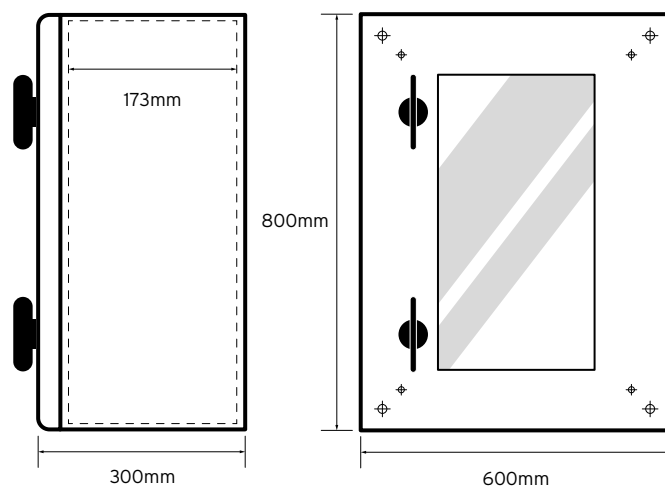

Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.