

POTENTIOMETER POT01




**22mm potentiometer with nylon 6:6 bezel.
Non-flammable. 270° spin angle.**

General Characteristics

Standards	BS EN 60393-1
Resistive value	1 kΩ
Maximum current	38.7 mA
Maximum power	1.5W (70°C)
Dielectric strength contact-contact	1750V rms
Isolation resistance	10 MΩ min (500VDC)
Degree of protection	IP65
Operating temperature	-15°C to +80°C

Technical Drawing

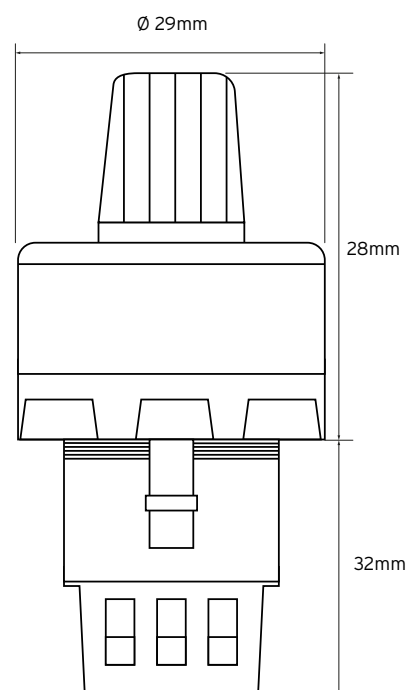

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.