

## PANEL COMPONENTS

### METAL CLAD FOOT SWITCH SFS1/Y




**Metal construction yellow painted foot switch, single speed operation. Easy wiring. Durable but light weight casing.**

#### General Characteristics

Standards	BS EN 60947-5-1
Overall depth	240mm
Maximum width	156mm
Maximum height	140mm
Degree of protection	IP65
Contacts	3A/230VAC; 1NO + 1NC
Contact material	AgNi
Mechanical life	>1M operations
Mechanical operating frequency	1800 on/off per hour
Electrical life	>100K operations
Electrical operating frequency	1200 on/off per hour
Insulation voltage $U_i$	300V
Impulse withstand voltage $U_{imp}$	2500V
Dielectric strength body-contact	2500 VAC
Dielectric strength contact-contact	1500 VAC
Operating temperature	-25°C to +80°C
Short circuit breaking capacity $I_{cs}$	1 kA
Operating temperature	-15°C to +80°C

#### Technical Drawing

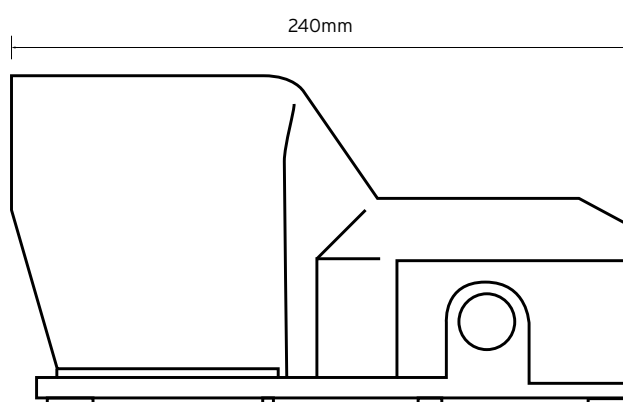

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.