

ENCLOSURES

STAINLESS STEEL ENCLOSURE SS504020




Wall mounting stainless steel enclosure with brushed finish. The polyurethane gasket keeps its profile over time to give a high degree of protection against water and dust. Door opens 125° and is reversible. Welded earth studs top and bottom. Fitted, galvanised backplate has return edges for extra rigidity

General Characteristics

| | |
|--------------------------------------|---|
| Standards | BSEN 61439-1, BSEN 60529, BSEN 62208 & BSEN 62262 |
| Ingress Protection | IP66 |
| Height | 500mm |
| Width | 400mm |
| Depth | 200mm |
| Material | 304 Grade |
| Enclosure Steel Thickness | 1.2mm |
| Backplate height | 454mm |
| Backplate width | 354mm |
| Useable depth with backplate fitted | 176mm |
| Backplate Thickness | 2mm |
| Number of Locks | 1 |
| Operating Temperature | -5°C to +40°C |
| Operating Relative Humidity at +20°C | 90% |
| Operating Relative Humidity at +40°C | 50% |
| Weight | 15.9 Kg |

Technical Drawing

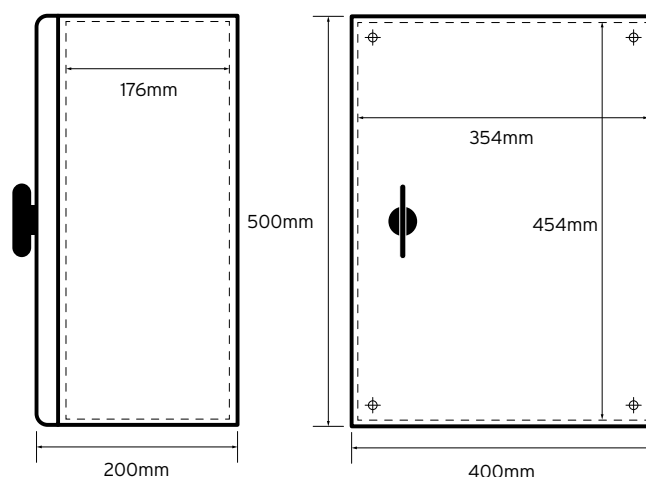

Available Accessories

| | |
|---------------------------------|---------|
| Plinth | SPS4020 |
| Stainless Steel Bit Lock | SSBL |
| Spare T Bit Key | STBK |
| Mild steel Padlockable Lock | DBPL |
| Wall Mount Brackets (pack of 4) | SSWB |
| 220mm Earth strap | ES22 |

Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.