


niglon Control & Automation

MOTOR CONTROL GEAR

STANDARD CONTACTOR

22A 3 POLE AC

3SC2224, 3SC22110, 3SC22240, 3SC22415

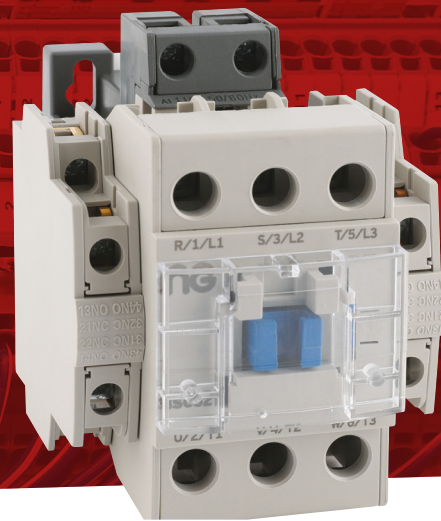

3 pole contactors are for the control of electric motors, and have auxiliary contacts fitted. Din rail mounting

General Characteristics

Standards	BS EN 60947-4, UL-508
AC-3 Rated Load	22A
AC-3 Rated Power @ 415V	11kW
Rated Operational Voltage (Ue)	≥ 690V
Main Contact Configuration	3 Pole NO
Auxiliary Contacts	1NO + 1NC
Maximum Operation Frequency	1800 per hour
Mechanical Endurance	25 000 000 ops
Electrical Endurance	2 500 000 ops
Width	67mm
Height	87mm
Depth	80mm
Terminal Capacity	2.5 to 10mm ²
Tightening Torque	4 Nm
Weight	0.37Kg

Coil Characteristics

Available Coil Voltages	24VAC, 110VAC, 230VAC
Inrush Current	95 VA
Sealed Current	9 VA
Pull-in Voltage	80 - 110 %
Thermal Dissipation	2W
Closing time	10 - 17 ms

Available Accessories

AUX0/2FM	Auxiliary Contact 2NC
AUX1/1FM	Auxiliary Contact 1NO/1NC
AUX0/4FM	Auxiliary Contact 4NC
AUX1/3FM	Auxiliary Contact 1NO/3NC
AUX2/2FM	Auxiliary Contact 2NO/2NC
AUX3/1FM	Auxiliary Contact 3NO/1NC
AUX4/0FM	Auxiliary Contact 4NO
AUX0/1SM	Auxiliary Contact 1NC side mount
AUX1/0SM	Auxiliary Contact 1NO side mount
4PMI135	Mechanical Interlock

Available Accessories

MMSCSC	Coupler to MMS
Manual Motor Starter MMS0.16	0.1 - 0.16 A
Manual Motor Starter MMS0.25	0.16 - 0.25 A
Manual Motor Starter MMS0.4	0.25 - 0.4 A
Manual Motor Starter MMS0.6	0.4 - 0.63 A
Manual Motor Starter MMS1.0	0.63 - 1.0 A
Manual Motor Starter MMS1.6	1.0 - 1.6 A
Manual Motor Starter MMS2.5	1.6 - 2.5 A
Manual Motor Starter MMS4.0	2.5 - 4 A
Manual Motor Starter MMS6.0	4 - 6 A
Manual Motor Starter MMS10	6 - 10 A
Manual Motor Starter MMS13	9 - 13 A
Manual Motor Starter MMS17	11 - 17 A
Manual Motor Starter MMS22	14 - 22 A
Thermal Overload ORSC0.16	0.1 - 0.16 A
Thermal Overload ORSC0.25	0.16 - 0.25 A
Thermal Overload ORSC0.4	0.25 - 0.4 A
Thermal Overload ORSC0.63	0.4 - 0.63 A
Thermal Overload ORSC1.0	0.63 - 1.0 A
Thermal Overload ORSC1.6	1.0 - 1.6 A
Thermal Overload ORSC2.5	1.6 - 2.5 A
Thermal Overload ORSC4	2.5 - 4 A
Thermal Overload ORSC6	4 - 6 A
Thermal Overload ORSC8	5 - 8 A
Thermal Overload ORSC9	6 - 9 A
Thermal Overload ORSC10	7 - 10 A
Thermal Overload ORSC13	9 - 13 A
Thermal Overload ORSC18	12 - 18 A
Thermal Overload ORSC22	16 - 22 A

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.



nigLON Control & Automation

MOTOR CONTROL GEAR


STANDARD CONTACTOR

22A 3 POLE AC

Technical Drawing

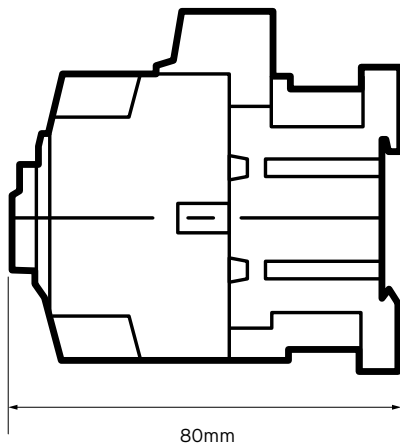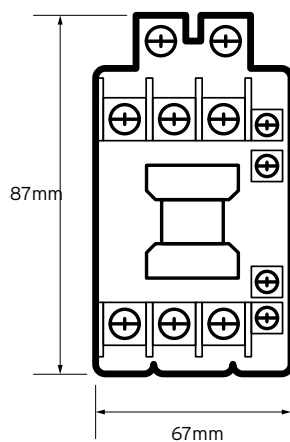

Wiring Diagram

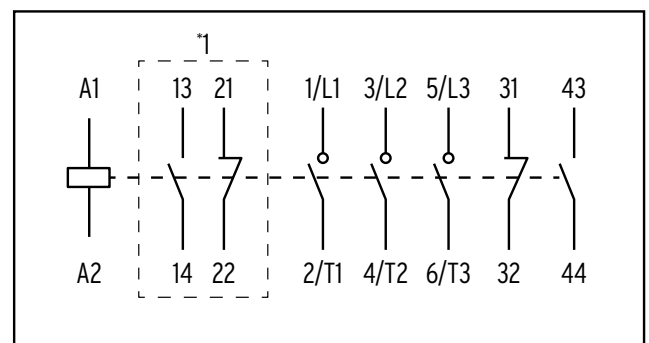

*1 - Optional axillary contact unit

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.