



M-201-G

USB Charger,
2100mA
(50 x 50mm)

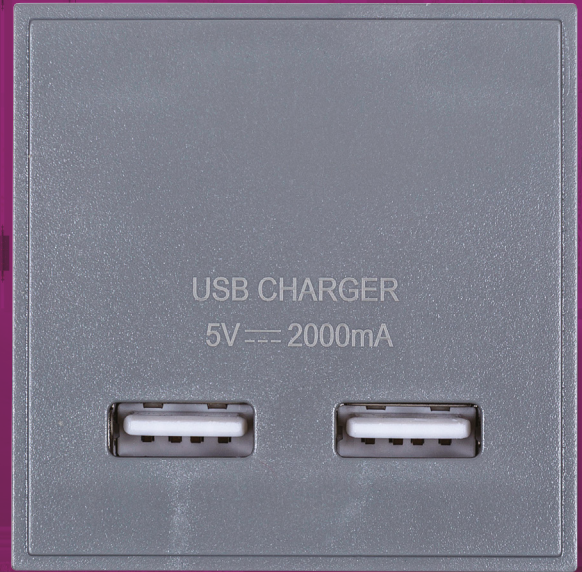

Technical Drawing

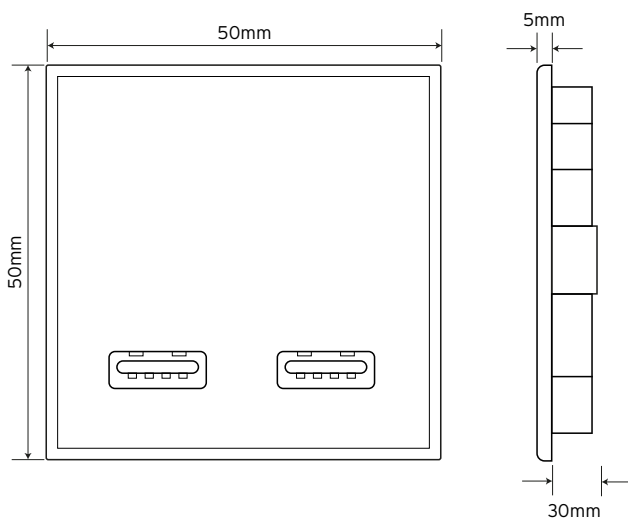

Technical Specifications

Material Composition	Module : Polycarbonate
Supply Voltage	240V~ 50Hz
Cable Size	1 x 1.0mm ² , 2 x 1.5mm ² or 2 x 2.5mm ²
Current Rating	2 Amp Total
Supply Current (Full Load)	0.5A
Standby Current	2mA Single
Charging Output	5Vdc 5%, 2.0A per module
Output Connector	2 x USB Type 'A'
Back Box Depth	35mm - 47mm
Module Size	Double Width (50mm x 50mm)
Modular	Yes
Warranty	1 Year Domestic
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BS EN 62368