NiGLON


Wiring Accessories

M-201 USB Charger, 2100mA (50 x 50mm)







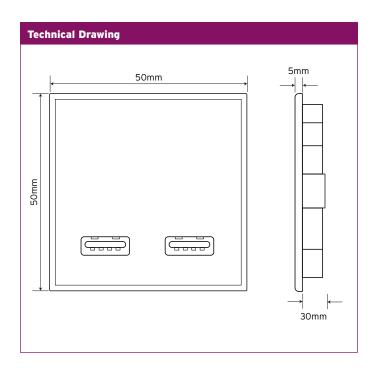

Technical Specifications	
Material Composition	Module : Polycarbonate
Supply Voltage	240V~ 50Hz
Cable Size	1 x 1.0mm², 2 x 1.5mm² or 2 x 2.5mm²
Current Rating	2 Amp Total
Supply Current (Full Load)	0.5A
Standby Current	2mA Single
Charging Output	5Vdc 5%, 2.0A per module
Output Connector	2 x USB Type 'A'
Back Box Depth	35mm - 47mm
Module Size	Double Width (50mm x 50mm
Modular	Yes
Warranty	1 Year Domestic
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BS EN 62368