
**NiGLON** Wiring **Accessories** 

## M-201-W USB Charger, 2100mA (50 x 50mm)







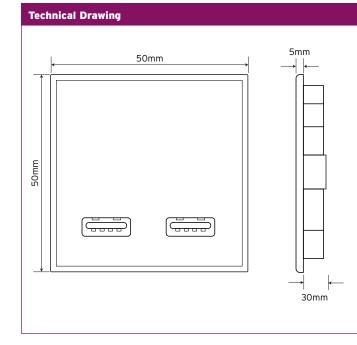

<b>Technical Specifications</b>	;
Material Composition	Module : Polycarbonate
Supply Voltage	240V~ 50Hz
Cable Size	1 x 1.0mm <sup>2</sup> , 2 x 1.5mm <sup>2</sup> or 2 x 2.5mm <sup>2</sup>
Current Rating	2 Amp Total
Supply Current (Full Load)	0.5A
Standby Current	2mA Single
Charging Output	5Vdc 5%, 2.0A per module
Output Connector	2 x USB Type 'A'
Back Box Depth	35mm - 47mm
Module Size	Double Width (50mm x 50mm
Modular	Yes
Warranty	1 Year Domestic
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BS EN 62368

E&OE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence.

o121 711 1990 niglon.co.uk | www.niglon.co.uk