


# M3CU24S/A200

## Dual RCD Controlled-Split Load



### Technical Drawing

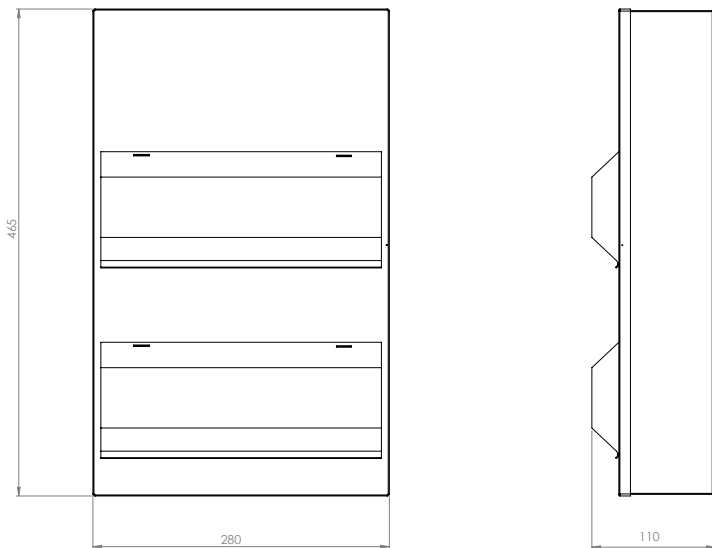

### Technical Specifications

<b>Material Composition</b>	Steel (Powder Coated)
<b>Paint Colour</b>	RAL 9010
<b>Configurations</b>	8+10 125A Incomer, 2 x 100A 30mA RCDs
<b>Standards</b>	BS7671, BS EN 61439-3
<b>125A Mains Incomer</b>	BS EN 60947-3
<b>Residual Current Devices(RCDs)</b>	100A-30mA (x2) : BS EN 61008-1
<b>No. available ways</b>	8+10
<b>Certification</b>	Intertek, Semko, VDE, CE, UKCA
<b>Rated Frequency (fn)</b>	50Hz
<b>IP Rating (Ingress Protection)</b>	IP20
<b>IK Rating (Impact Protection)</b>	IK05
<b>Maximum Incoming Cable Size</b>	35mm <sup>2</sup>
<b>Dimensions</b>	465 (H) x 280 (W) x 110mm (D)
<b>Rated Operational Voltage (Un/Ue)</b>	230V AC
<b>Rated Current of Assembly (InA)</b>	100A
<b>Rated Frequency</b>	50Hz
<b>IP Rating (Ingress Protection)</b>	IP20
<b>IK Rating (Impact Protection)</b>	IK05
<b>RCD Type</b>	Type "A"