


### NCU25 25A Flex Outlet



**20  
YEAR  
GUARANTEE**

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

#### Technical Drawing

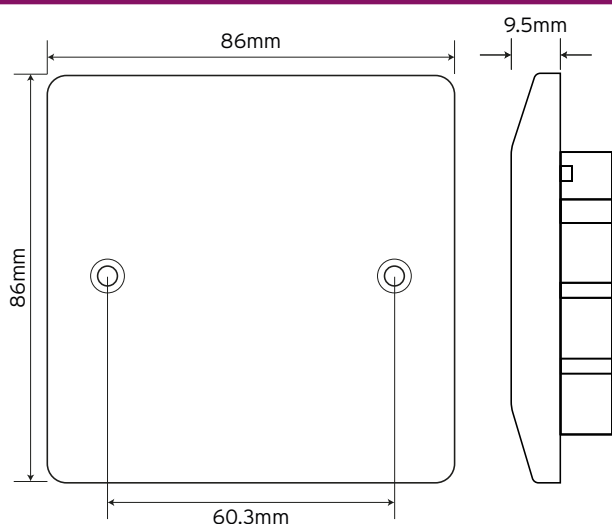

#### Technical Specifications

<b>Material Composition</b>	Front Plate: Urea Earthing Yoke: Mild Steel Terminal Housing: Urea Terminals: Brass Terminal Screws: Steel & Yellow Passivated
<b>Voltage</b>	240V~ 50Hz
<b>Current Rating</b>	25A
<b>Terminal Size</b>	4.6mm Entry
<b>Torque Value</b>	0.8Nm
<b>Terminal Capacity</b>	2 x 10mm <sup>2</sup>
<b>Flex Outlet</b>	Yes (20mm x 21mm)
<b>IP Rating</b>	IP20
<b>Back Box Depth</b>	25-47mm deep
<b>Operational Temperature</b>	-5° to +40°C
<b>Standards</b>	BS 5733: 2010
<b>Dimensions</b>	86x86x9.5mm (HxWxD)