
NiGLON Wiring **Accessories**

NFS13-F 13A Fused Connection Unit

A new take on traditional moulded wiring accessories manufactured in bright white Urea.



Technical Specifications	5
Material Composition	Front Plate & Rear Housing -Urea Terminals - Brass Terminal Screws - Steel & Yellow Passivated Internal Mechanism - Formed Press Brass Silver "on-lay" Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	13A
Terminal Size	5mm ø
Torque Value	2.5Nm
Cable Size	3 x 2.5mm ² or 2 x 4.0mm ²
Double Pole	No
Twin Earth	Yes
Back Box Depth	25mm
Warranty	20 Years
Anti Microbial Certified	Yes
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC, Modified ISO 22196, BS 1363-4:1995+A4:2012. Fuses to BS 1362:1973
Dimensions	86x86x10mm (HxWxD)

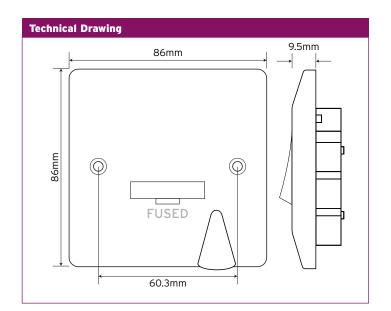

YEAR Guarantef

NiGLON

E&OE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. 0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk