

NFS13DP


13A Switched Fused Connection Unit



**20
YEAR
GUARANTEE**

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

Technical Drawing

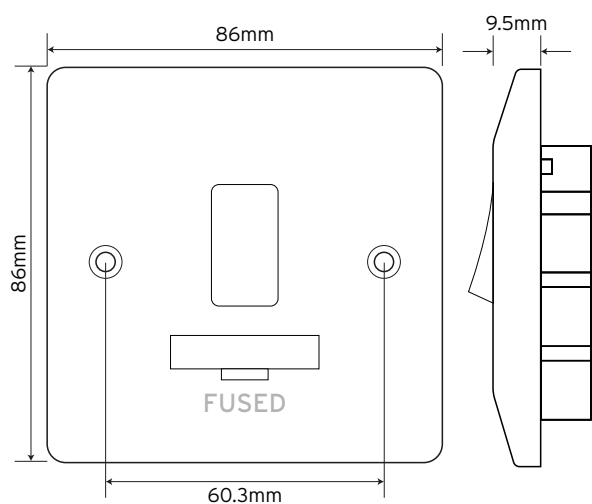

Technical Specifications

| | |
|---------------------------------|--|
| Material Composition | Front Plate, Rocker Switch & Rear Housing - Urea Terminals - Brass Terminal Screws - Steel & Yellow Passivated Internal Mechanism - Formed Press Brass Silver "on-lay" Copper / Brass Contacts |
| Voltage | 240V~ 50Hz |
| Current Rating | 13A |
| Terminal Size | 5mm ø |
| Torque Value | 2.5Nm |
| Cable Size | 3 x 2.5mm ² or 2 x 4.0mm ² |
| Double Pole | Yes |
| Twin Earth | Yes |
| Back Box Depth | 25mm |
| Warranty | 20 Years |
| Anti Microbial Certified | Yes |
| Operational Temperature | -5° to +40°C |
| Standards | The Low Voltage Directive 2006/95/EC, Modified ISO 22196, BS 1363-4:1995+A4:2012, Fuses to BS 1362:1973 |
| Dimensions | 86x86x9.5mm (HxWxD) |