



NS132USB-3

2 Gang Socket Outlet with 2xUSB

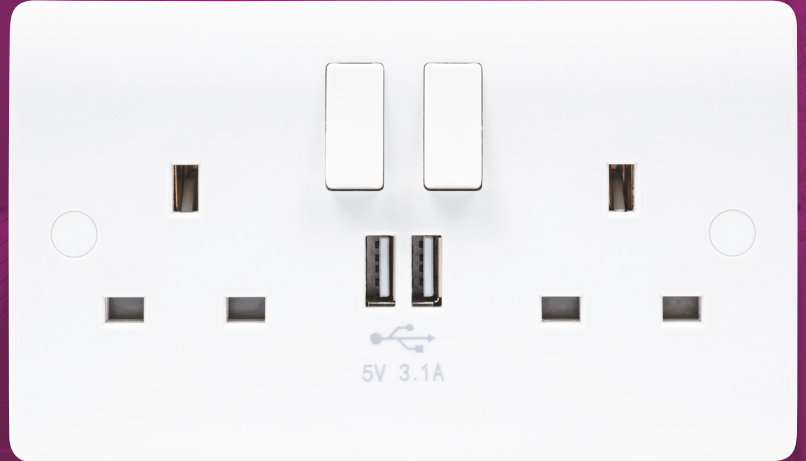

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

Technical Drawing

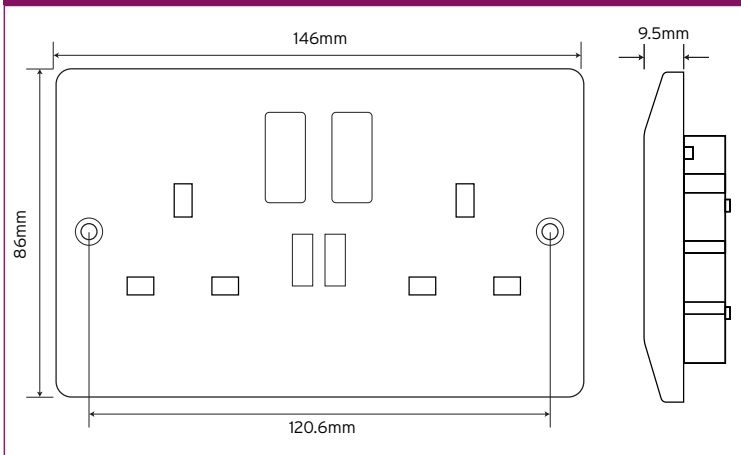

Technical Specifications

Material Composition	Front Plate, Rocker Switch & Rear Housing- Urea Terminals: Brass, Terminal Screws - Steel & Yellow Passivated Earth Strap: Mild Steel, Silver "on-lay" Copper/ Brass Contacts
Voltage	240V ~ 50Hz
Current Rating	13A
Terminal Size	5mm ϕ
Torque Value	2.5Nm
Cable Size	4 x 2.5mm ²
Back Box Depth	25mm
Anti Microbial Certified	Yes
USB Charging Output	5V DC, 3.1A
USB Output Connector	USB Type "A"
USB Standby Current	2mA
IP Rating	IP20
Warranty	2 Year
Operational Temperature	-5° to +40 °C
Standards	BS 1363-2:1995+A4:2012, EN 61000-6-1:2007 EN 61000-6-3:2007+A1:2011 The EMC directive 2014/30/EU
Dimensions	86x146x9.5mm (HxWxD)
Poles	Single
Switched	Yes