


A new take on traditional moulded wiring accessories manufactured in bright white Urea.

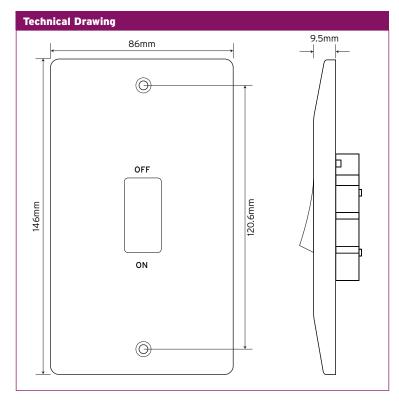

Technical Specifications	
Material Composition	Front Plate & Rocker Switch - Urea Rear Housing - Urea, Terminals - Brass, Neon Lens - Polycarbonate Terminal Screws - Steel & Yellow Passivated Internal Mechanism - Formed Press Brass Silver "On-lay" Copper / Brass Contacts Internal Busbars- Formed Pressed Brass Earth Strap - Mild Steel
Voltage	240V~ 50Hz
Current Rating	45A
Terminal Size	6mmø
Torque Value	2.5Nm
Cable Size	4 x 4mm <sup>2</sup> , 3 x 6mm <sup>2</sup> , or 1x10mm <sup>2</sup>
Double Pole	Yes
Twin Earth	Yes
Back Box Depth	35-47mm
Warranty	20 Years
Anti Microbial Certified	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	BS EN 60669-1:1999 +A1:2002 +A2:2008
Dimensions	146x86x9.5mm (HxWxD)