
**NiGLON** Wiring Accessories

**NSP662 10AX** Light Switch

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

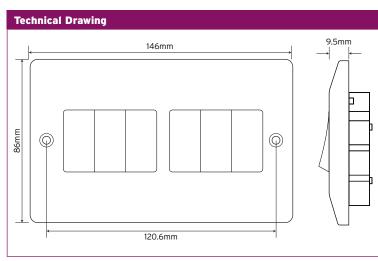

## No. Gangs and Ways 6 Gang, 2 Way **Material Composition** Front Plate - Urea Rear Housing - Nylon Terminals - Brass, Terminal Screws - Steel & Yellow Passivated Internal Mechanism - Formed Press Brass Silver "on-lay" Copper / Brass Contacts - . - . .

**Technical Specifications** 

EAR GUARANTEE

Voltage	240V~ 50Hz
Current Rating	10AX (suitable for inductive loads)
Terminal Size	3.5mm ø
Torque Value	0.4Nm
Cable Size	4 x 1.5mm <sup>2</sup> or 2 x 2.5mm <sup>2</sup>
Back Box Depth	25mm
Modular	Yes
Warranty	20 Years
Anti Microbial Certified	Yes
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC BS EN 60669-1:1999 + A1:2002 + A2:2008 Modified ISO 22196
Dimensions	86x146x9.5mm (HxWxD)

E&OE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Suppli accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.