


# niglon

## Circuit Protection

# Cylindrical Standard gL Pack of 10



### Technical Drawing

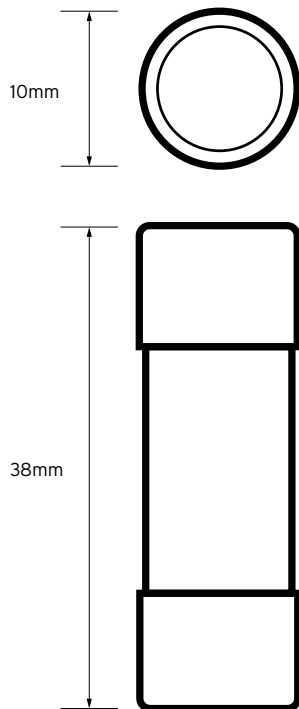

### The Range

List No.	Amp	Power Dissipation at In	Rated Voltage AC (IEC)
G1038-02	2A	0.5W	500V
G1038-04	4A	0.85W	500V
G1038-06	6A	0.95W	500V
G1038-10	10A	1.3W	500V
G1038-16	16A	1.9W	500V
G1038-20	20A	2.4W	500V
G1038-25	25A	2.7W	500V
G1038-32	32A	2.8W	400V

### Technical Specifications

Class	gL / gG
Rated Breaking Capacity AC	120kA
Size	10 x 38mm
Standard of Compliance	IEC 60269-1
Pack Qty	10
Certified	