
NiGLON Installation **Essentials**

Nylon-PA 12 Way Strips

| The Range | | | | | | | |
|-----------|------|---------|-----------------------|------------|------------|-----------|-------------|
| List No | Amps | Voltage | Wiring Capacity | Height (a) | Length (b) | Width (c) | Spacing (d) |
| NYN5 | 5A | 450V | 1.5-6mm ² | 14mm | 116.5mm | 20mm | 10mm |
| NYN15 | 15A | 450V | 2.5-10mm ² | 16.3mm | 139.3mm | 23.4mm | 12mm |
| NYN30 | 30A | 750V | 4.0-16mm ² | 20.9mm | 169.5mm | 28mm | 14.5mm |

Technical Drawing

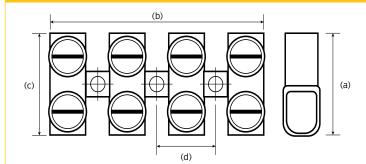

| Technical Specifications | | | | |
|--------------------------|-----------------------|--|--|--|
| Material of insulation | Nylon-PA | | | |
| Colour | Natural | | | |
| Metal Part | Steel Insert | | | |
| Terminal Screw | Zinc-Plated Steel | | | |
| Screw terminals | Screw Connection | | | |
| Number of poles | 1 - 12 | | | |
| Ambient temperature | T85 - T110 | | | |
| Standards of Compliance | BS EN60998-1, UL94-VO | | | |
| Certification | <u>ه</u> د و | | | |

EXOE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence. 0121 711 1990 **NIGLON** ales@niglon.co.uk | www.niglon.co.uk