


# niGLON

## Circuit Protection

# RCD Incomer Kits (Supplied with links)



Technical Drawing 4 Pole

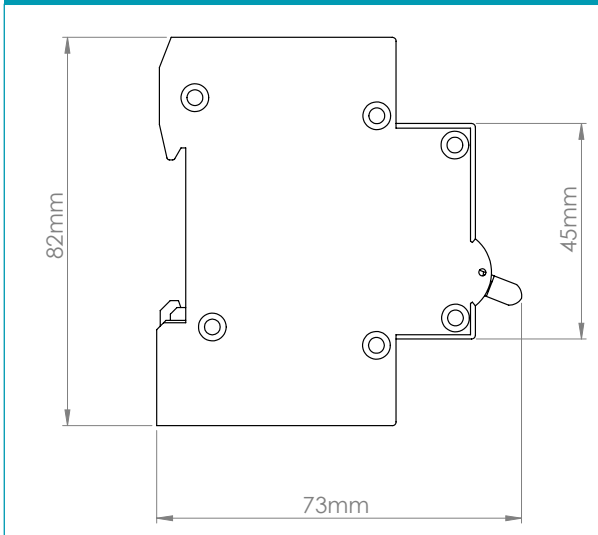

Technical Specifications

List No	ICK100430	ICK1004100	ICK1004300	ICK1004100S
Number of poles	4P	4P	4P	4P
Rate voltage(Un)	400VAC	400VAC	400VAC	400VAC
Rated Current	100A	100A	100A	100A
Rated Residual Current	30mA	100mA	300mA	100mA
Time Delay	-	-	-	4 Seconds
Rated frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Rated short-circuit capacity	10kA	10kA	10kA	10kA
IP degree	IP20	IP20	IP20	IP20
Terminals	1-35mm <sup>2</sup>	1-35mm <sup>2</sup>	1-35mm <sup>2</sup>	1-35mm <sup>2</sup>
Torque of screw	3Nm	3Nm	3Nm	3Nm
Standards	BS EN 60439-3	BS EN 60439-3	BS EN 60439-3	BS EN 60439-3
Dimensions (HxDxW)	82 x 73 x 70mm	82 x 73 x 70mm	82 x 73 x 70mm	82 x 73 x 70mm