


NSA2-240

Type 2 Surge Protection Kit - Compact Pluggable c/w neutral & earth links



Technical Specifications	
Change to Suitable for Earthing Type	TN-C, TN-C-S, IT & TT
Type	Type 2
Rated Working voltage of Uo	230V
Max. discharge current (Imax)	40kA
Nominal Discharge current 8/20µs (kA)	20kA
Max. Continuous operating voltage (Uc)	275 V~
Voltage protection level (kV) (Up)	335 Vac withstand
Supplied with cables	Yes
IP Rating	IP20
Material	PA66
Local indicator	Green indicates normal state and red indicates failure
Flammability Rating	Comply with UL94V-0
Remote Signaller	Yes
Busbar Mounting	Yes
Relevant Standards	BS EN 61643-11

Wiring Diagram

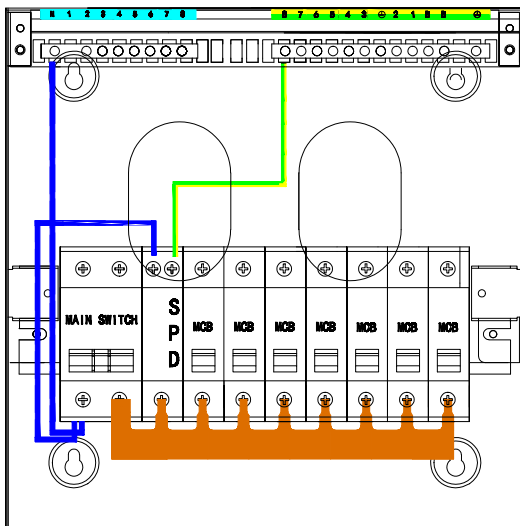

Technical Drawing

