

## PANEL COMPONENTS

### PUSH-BUTTON STATION MH72/1NC





Control station for surface mount. 72mm large mushroom headed pushbutton with twist to release operation. ABS plastic construction

#### General Characteristics

Standard	EN 60947-5-1
Contacts	4A/230VAC; 1NC
Contact material	AgNi
Overall depth	90mm
Depth of box	51.7mm
Width of box	68mm
Height of box	72mm
Diameter of pushbutton	72mm
Degree of protection	IP65
Mechanical life	>1M operations
Mechanical operating frequency	3000 on/off per hour
Electrical life	>100K operations
Electrical operating frequency	1200 on/off per hour
Insulation voltage Ui	300V
Impulse withstand voltage Uimp	2500V
Dielectric strength body-contact	2500 VAC
Dielectric strength contact-contact	1500 VAC
Short circuit breaking capacity Ics	1 kA
Operating temperature	-15°C to +80°C

#### Technical Drawing

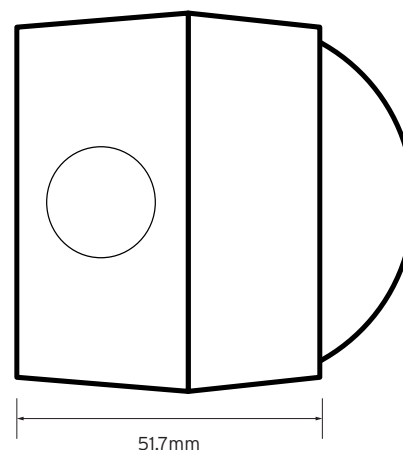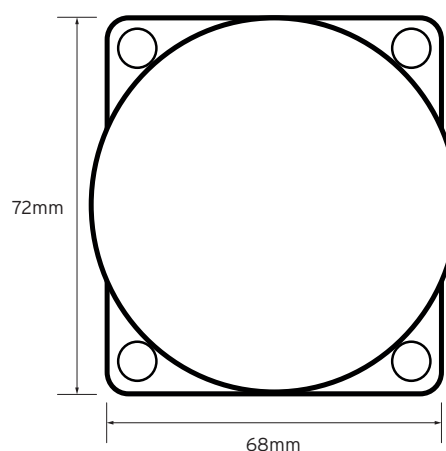

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.