



NG86-50/VPC3


IP66 Membrane Moulded with 3x Lever Connectors



Technical Specifications - VPC3

Rating	32A / 450V
Temperature	85°C
Material	Polycarbonate UL94 V2
Standard of Compliance	IEC/EN 60998-1, 60998-2-2  
Conductors	3
Conductor Entry	3 x solid, stranded or fine
Dimensions	8.3 x 18.7 x 18.6mm (H x W x D)

Technical Drawing

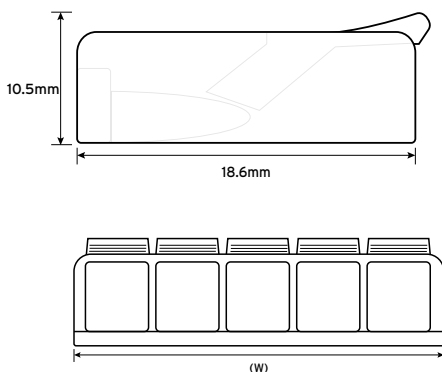

Technical Specifications - NG86-50

Voltage	400W
Material	PP+GF, Gasket TPE
Glow wire test	750°C
Temp. Range	-30°C -100°C
Membrane or threaded cable entries	8x M20
Standards	CE, Rohs, UV, V0
IP Rating	IP66
Dimensions	86 x 86 x 50mm
Colours	Black

Technical Drawing

