


# nigLON

General Lighting

## TS4M Mini Photocell



### Technical Drawing

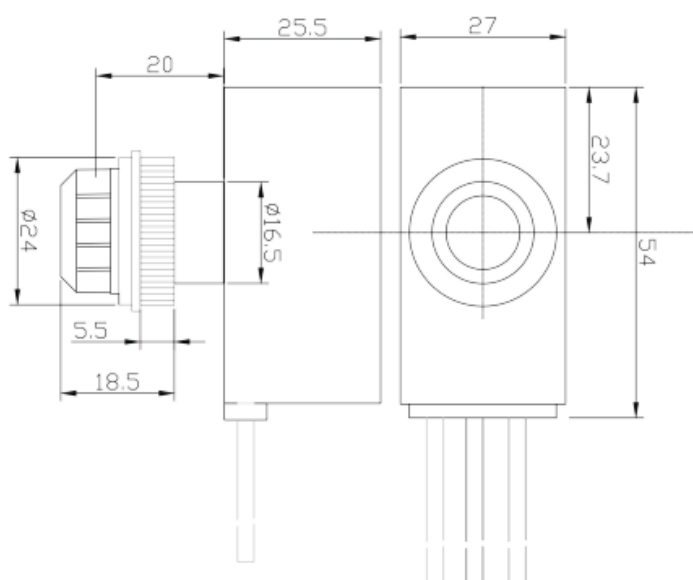

DIMENSIONS IN mm

### Technical Specifications

<b>Class</b>	Class II (Must not be earthed)
<b>Ingress Protection (IP)</b>	IP54(Casing), IP66(Lens)
<b>Nominal Voltage</b>	120/240/277 Vac,50/60Hz
<b>Applicable Voltage</b>	105-305 Vac,50/60Hz
<b>Rated Load</b>	10A (5A)
<b>Sensor</b>	Photodiode
<b>Standard of Compliance</b>	CE, UKCA
<b>Power Consumption</b>	<1W
<b>Operating Temperature</b>	-30C to +70C
<b>Life Span</b>	5000 Operations Minimum
<b>Fail Mode</b>	Fail Off
<b>Switch on Level</b>	<70 Lux
<b>Switch off Level</b>	>105 Lux
<b>On/Off Delay</b>	10-30 secs
<b>Clearance Hole Required</b>	17mm Dia.
<b>Max. Load</b>	LED: 600W Incandescent: 2000W HPS/MH: 1000W