


# niGLON

General Lighting

## TS4MR Mini Remote Photocell



### Technical Drawing

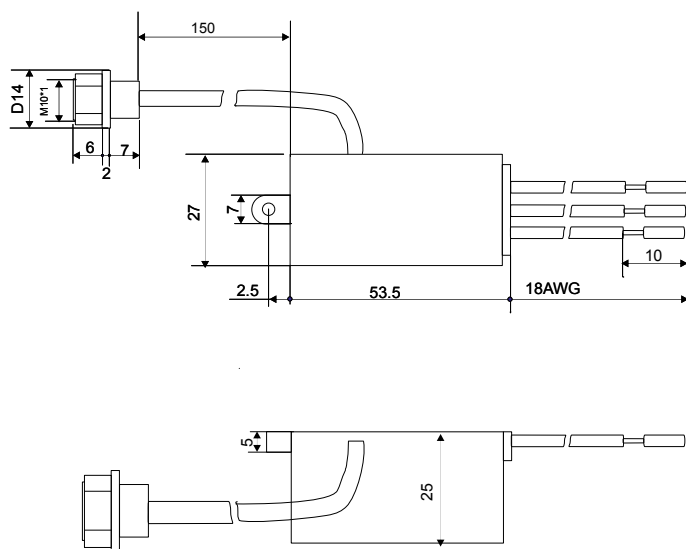

### Technical Specifications

|                                |   |
|--------------------------------|---|
| <b>Class</b>                   | Class II (Must not be earthed)                    |
| <b>Ingress Protection (IP)</b> | IP54(Casing), IP66(Lens)                          |
| <b>Nominal Voltage</b>         | 120/240/277 Vac,50/60Hz                           |
| <b>Applicable Voltage</b>      | 105-305 Vac,50/60Hz                               |
| <b>Rated Load</b>              | 10A (5A)  |
| <b>Sensor</b>                  | Photodiode  |
| <b>Standard of Compliance</b>  | CE, UKCA  |
| <b>Power Consumption</b>       | <1W   |
| <b>Operating Temperature</b>   | -30C to +70C                                      |
| <b>Life Span</b>               | 5000 Operations Minimum                           |
| <b>Fail Mode</b>               | Fail Off  |
| <b>Housing</b>                 | UV Stabilized Polycarbonate                       |
| <b>Switch on Level</b>         | <70 Lux   |
| <b>Switch off Level</b>        | >105 Lux  |
| <b>On/Off Delay</b>            | 10-30 secs  |
| <b>Clearance Hole Required</b> | 10mm Dia.   |
| <b>Max. Load</b>               | LED: 600W<br>Incandescent: 2000W<br>HPS/MH: 1000W |