

# niGLON


## Installation Essentials

### FR351

### Dry Lining Fire Rated Box



#### Technical Drawing

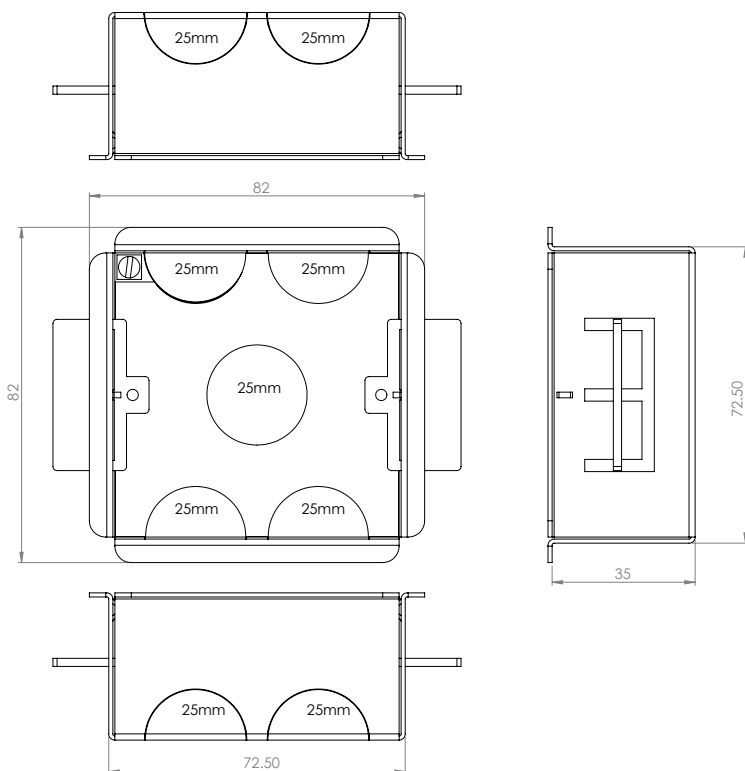

#### Technical Specifications

|                            |   |
|----------------------------|---|
| <b>Board Thickness</b>     | 9-22mm  |
| <b>Cut Out Dimensions</b>  | 73 mm x 73 mm   |
| <b>Lug Type</b>            | Adjustable  |
| <b>Material</b>            | Galvanised Steel  |
| <b>Mounting Depth</b>      | 35mm  |
| <b>Number of Gangs</b>     | 1   |
| <b>Dimensions</b>          | 82x82x36mm (HxWxD)  |
| <b>Number of Knockouts</b> | 5 x 25mm  |
| <b>Earth Terminal</b>      | Yes - Brass   |
| <b>Pad Insert</b>          | Intumescent Composite   |
| <b>Standards</b>           | BS4662 (where applicable)<br>(Acoustic) ISO 10140-2:2010<br>(120min. Fire Resistance)<br>EN 1363-1:2020, EN 1364-1:2015 |