
NiGLON Installation **Essentials**

FR352 Dry Lining Fire Rated Box



Technical Drawing

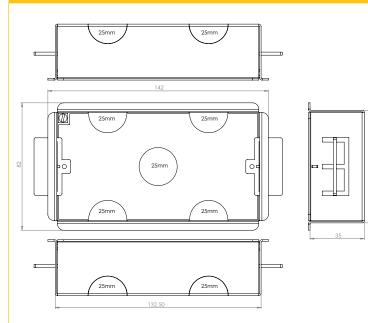

Technical Specifications	
Board Thickness	9-22mm
Cut Out Dimensions	73mm x 133mm
Lug Type	Adjustable
Material	Galvanised Steel
Mounting Depth	47mm
Number of Gangs	1
Dimensions	82x142x35mm (WxWxD)
Number of Knockouts	5 x 25mm
Earth Terminal	Yes - Brass
Pad Insert	Intumescent Composite
Standards	BS4662 (where applicable) (Acoustic) ISO 10140-2-2010 (120min. Fire Resistance) EN 1363-1:2020, EN 1364-1:2015

ESOE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its aclaloques, brochures, printed media or within any online presence.

0121 711 1990 **NiGLON** ales@niglon.co.uk | www.niglon.co.uk