
NiGLON Installation **Essentials**

FR472 Dry Lining Fire Rated Box



Technical Drawing

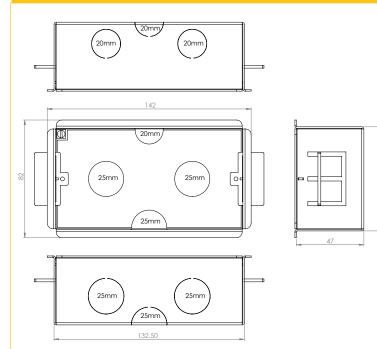

	Technical Specifications	
Ā	Board Thickness	9-31mm
	Cut Out Dimensions	73mm x 133mm
	Lug Type	Adjustable
	Material	Galvanised Steel
	Mounting Depth	47mm
	Number of Gangs	1
	Dimensions	82x142x47mm (HxWxD)
	Number of Knockouts	3 x 25mm, 3 x 20mm
	Earth Terminal	Yes - Brass
	Pad Insert	Intumescent Composite
	Standards	BS4662 (where applicable) (Acoustic) ISO 10140-2-2010 (120min. Fire Resistance) EN 1363-1:2020, EN 1364-1:2015

E&OE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence. 0121 711 1990 **NiGLON** ales@niglon.co.uk | www.niglon.co.uk