

# niGLON™

## Wiring Accessories

# MEDIAN


## NS132USB-3

### 2 Gang DP Switched Socket Outlet with 2 USB Ports



A new take on traditional moulded wiring accessories manufactured in bright white Urea.

#### Technical Drawing

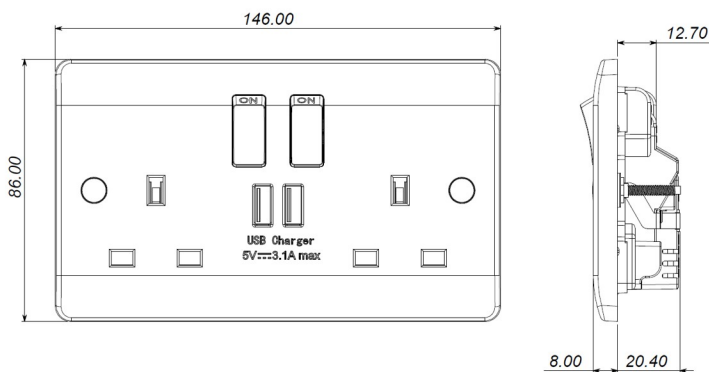

#### Technical Specifications

Material	Front Plate - Urea Rear Housing - Nylon Terminals - Brass Terminal Screws - Steel & Yellow Passivated
Voltage	240V~ 50Hz
Current Rating	13A
Torque Value	1.8Nm
Cable Capacity	4 x 2.5mm <sup>2</sup>
Back Box Depth	25mm
USB Charging Output	5V DC, 3.1A (Total)
USB Output Connector	USB Type "A"
Standby Current	2mA
Anti Microbial Certified	Yes
Warranty	20 Years
IP Rating	IP20
Operational Temperature	-5 to +40 C
Standards	BS1363-2:2023, BS EN 62368 EMC 2014/30/EU
No. Poles Switched	Double Pole Yes