




NSPM12

2 Way Switch Module

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

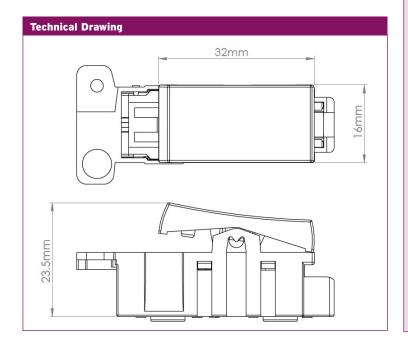

Technical Specifications

Material Rocker - Urea

> Base - Nylon Terminals - Brass Terminal Screws -

Steel/Yellow Passivated

Contacts Silver "on-lay"/Brass 250V~ 50Hz 10AX

Rating Cable Capacity 4 x 1.5mm2, 2 x 2.5mm2

Torque Value

Back Box Depth Operational

Voltage

Temperature Warranty Standards Module Width 0.4Nm Dependant on plate used

-5C to +40C 20 Years BS EN 60669-1 Single Module