

ENCLOSURES

PAINTED MILD STEEL ENCLOSURES

A range of wall mounting mild steel enclosures painted with epoxy-polyester powder paint. Standard RAL7035 colour. The polyurethane gasket keeps its profile over time to give a high degree of protection against water and dust. Door opens 125° and is reversible, so the gland plate can be top or bottom. Welded earth studs top and bottom. Fitted, galvanised backplate has return edges for extra rigidity.




General Characteristics

Standards	BSEN 61439-1, BSEN 60529, BSEN 62208, BSEN 62262
Ingress Protection	IP66
Enclosure Steel Thickness	1.2mm
Backplate Thickness	2mm
Operating Temperature	-25°C to +55°C
Operating Relative Humidity at +20°C	90%
Operating Relative Humidity at +40°C	50%

Available Accessories

Document Pocket	A4DOCW
Spare T Bit Key	STBK
Mild Steel Key Lock	MSKL
Spare Key	SPAK
Mild steel Padlockable Lock	DBPL
Wall Mount Brackets (pack of 4)	SSWB
220mm Earth strap	ES22

Technical Drawing

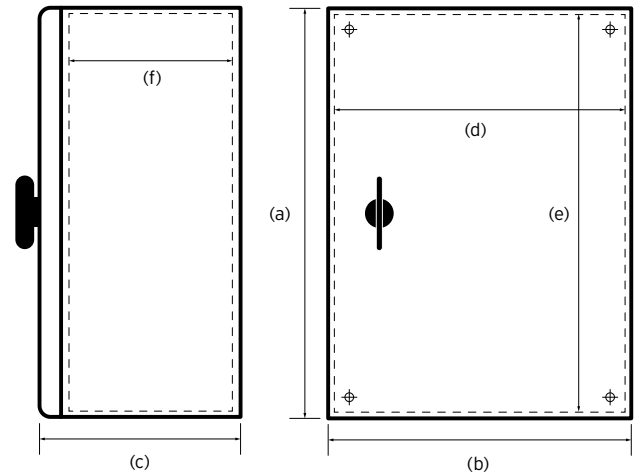

Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.

ENCLOSURES

PAINTED MILD STEEL ENCLOSURES



General Characteristics	Height (a) mm	Width (b) mm	Depth (c) mm	Backplate height (d) mm	Backplate width (e) mm	Useable depth with backplate fitted (f) mm	No of Gland Plates	Gland plate dimensions mm	Number of Locks	Weight Kg
MS302015	300	200	150	254	154	126	1	130x61	1	4.1
MS302515	300	250	150	254	204	126	1	130x61	1	4.5
MS303015	300	300	150	254	254	126	1	180x61	1	4.9
MS303020	300	300	200	254	254	176	1	180x61	1	5.3
MS303025	300	300	250	254	254	226	1	180x61	1	5.5
MS403015	400	300	150	354	254	126	1	180x61	1	6.4
MS403020	400	300	200	354	254	176	1	180x61	1	6.7
MS403025	400	300	250	354	254	226	1	180x61	1	7.6
MS404020	400	400	200	354	354	176	1	316x120	1	6.9
MS503020	500	300	200	454	254	176	1	180x61	1	7.9
MS504020	500	400	200	454	354	176	1	316x120	1	10.5
MS504025	500	400	250	454	354	226	1	316x120	1	10.9
MS505025	500	500	250	454	454	226	1	316x120	1	13.5
MS604020	600	400	200	554	354	176	1	316x120	2	12.8
MS604030	600	400	300	554	354	276	1	316x120	2	13.3
MS605020	600	500	200	554	454	176	1	316x120	2	13.9
MS605025	600	500	250	554	454	226	1	316x120	2	14.3
MS605030	600	500	300	554	454	276	1	316x120	2	14.4
MS606020	600	600	200	554	554	176	1	416x120	2	19.5
MS606025	600	600	250	554	554	226	1	416x120	2	21.2
MS806020	800	600	200	754	554	176	1	416x120	2	26.1
MS806030	800	600	300	754	554	276	1	416x120	2	28.4
MS1006030	1000	600	300	954	554	276	1	416x120	2	36.7
MS1008030	1000	800	300	954	754	276	2	316x120	2	39.8
MS1208030	1200	800	300	1154	754	276	2	316x120	2	45.2
MS12010030	1200	1000	300	1154	954	276	2	416x120	3	63.0

Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.