






## **NS132S-A**

2 Gang SP Switched Socket Outlet

A new take on traditional moulded wiring accessories manufactured in bright white Urea.

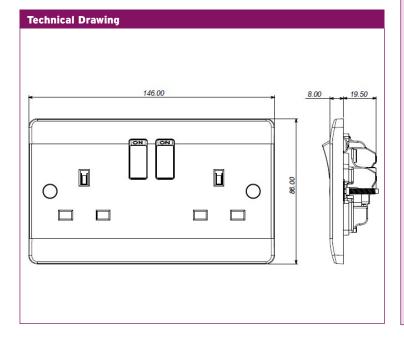

## **Technical Specifications**

Front Plate - Urea Material

Rear Housing - Nylon Terminals - Brass

Terminal Screws - Steel &

Yellow Passivated

Voltage 240V~ 50Hz **Current Rating** 13A **Torque Value** 1.8Nm Cable Capacity 4 x 2.5mm2

Back Box Depth Anti Microbial

Certified Warranty IP Rating Operational

Temperature Standards No. Poles Switched

**BSI Kitemark** 

Yes 20 Years **IP20** 

25mm

-5 to +40 C BS1363-2:2023 Single Pole

Yes

Yes (KM 794001)

