

niGLON™


Circuit Protection

A Type Switched Line & Neutral Bi-Directional RCBO

1P+N Mini Combined -
240V 30mA B Space Saver



Technical Drawing

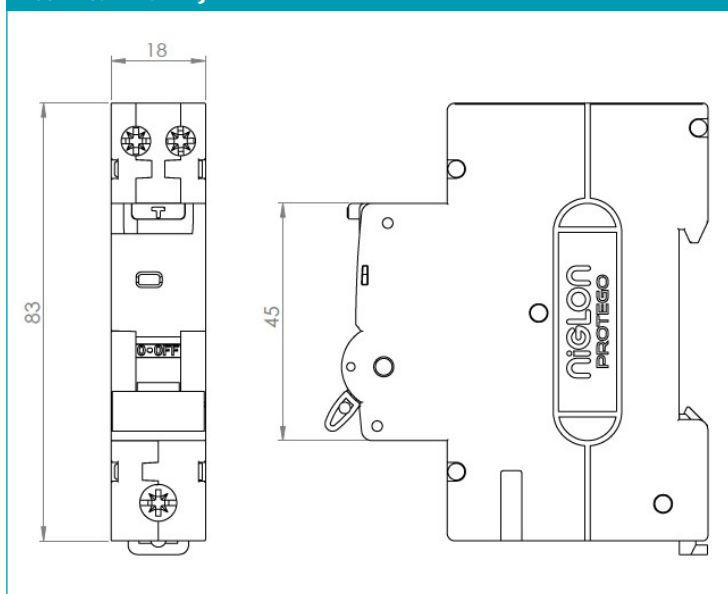

Technical Specifications

| | |
|--------------------|---|
| Rated Voltage | 240V |
| RCD Type | A |
| Tripping Curve | B |
| Breaking Capacity | 6kA |
| Rated trip current | 30mA |
| Cable Capacity | L=25mm ² , L/N=10mm ² |
| Space Saver | Yes |
| Torque Rating | L=2.5Nm, L/N=1.2Nm |
| Bi-directional | Yes |
| Standards | BS EN 61009-1, IEC 61009-2-2 |
| List No. | Rated Current |
| RCBO1-6/30SAX2 | 6A |
| RCBO1-10/30SAX2 | 10A |
| RCBO1-16/30SAX2 | 16A |
| RCBO1-20/30SAX2 | 20A |
| RCBO1-25/30SAX2 | 25A |
| RCBO1-32/30SAX2 | 32A |
| RCBO1-40/30SAX2 | 40A |