niglon Control & Automation

ENCLOSURES

ABS PLASTIC - OPAQUE DOOR -PE302513

Economy range wall mounting polycarbonate enclosure intended for outdoor use. Standard RAL7035 colour. High resistance to harsh weather conditions, corrosion and impact. Easily machinable. Metal backplate and fixing brackets included


General Characteristics

| Material | ABS Plastic |
|-------------------------------------|-----------------|
| Flame test | 650°C Glow Wire |
| Ingress Protection | IP65 / IK10 |
| Height | 300mm |
| Width | 250mm |
| Depth | 140mm |
| Useable depth with backplate fitted | 118 |
| Backplate | 300x190mm |
| Number of Locks | 1 |
| Operating Temperature | -25°C to +60°C |
| Weight | 1.75 Kg |

Available Accessories

| Document Pocket | A4DOCW |
|--------------------------------|--------|
| Key Lock with Butterfly Handle | PEKL |

Technical Drawing

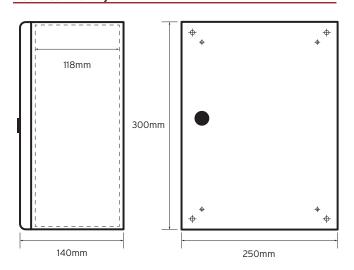

Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.