

# niglon Control & Automation

## ENCLOSURES

### ABS PLASTIC - OPAQUE DOOR - PE605022



Economy range wall mounting polycarbonate enclosure intended for outdoor use. Standard RAL7035 colour. High resistance to harsh weather conditions, corrosion and impact. Easily machinable. Metal backplate and fixing brackets included


#### General Characteristics

Material	ABS Plastic
Flame test	650°C Glow Wire
Ingress Protection	IP65 / IK10
Height	600mm
Width	500mm
Depth	220mm
Useable depth with backplate fitted	185mm
Backplate height	530mm
Backplate width	445mm
Number of Locks	2
Operating Temperature	-25°C to +60°C
Weight	7.28 Kg

#### Available Accessories

Document Pocket	A4DOCW
Key Lock with Butterfly Handle	PEKL

#### Technical Drawing

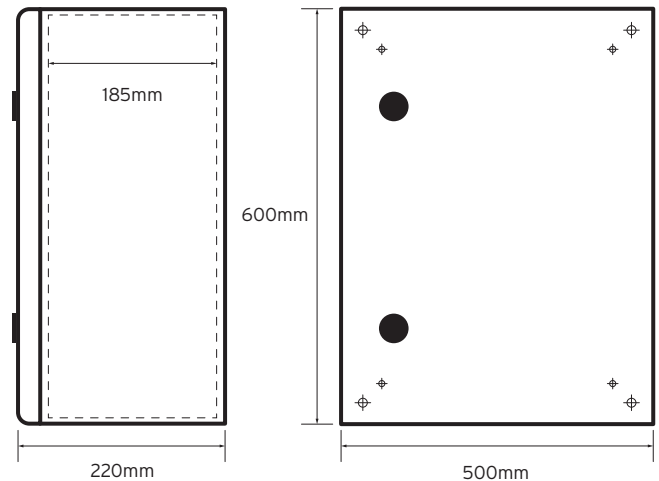

#### Additional Information

The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.