


## PANEL COMPONENTS

### PANEL TRANSFORMERS PT250/230-24

Control panel transformer, double wound, with earth screen for mains isolation. Easy fix frame for simple fixing. Shrouded terminal block. Full varnish impregnation.

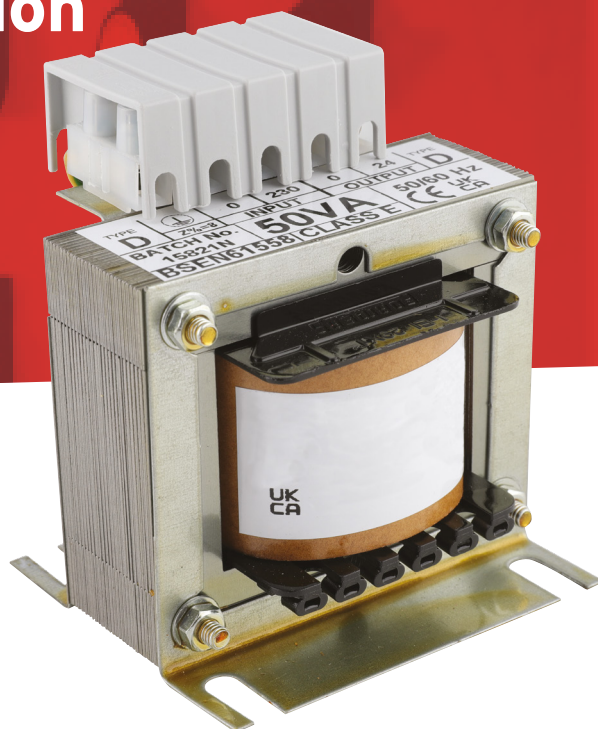

#### General Characteristics

Standard	BSEN 61558
Power	250 VA
Input voltage	230V 1ph
Output voltage	24V 1ph
Duty	Continuous
Frequency	50 / 60 Hz
Isolation class	1
Insulation class	E
Ambient temperature	+21°C
Overall height	116mm
Width	118mm
Depth	93mm
Fixing centres	95x68mm
Weight	3.4 Kg

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.