


## PANEL COMPONENTS

# PANEL TRANSFORMERS

## PT50/400-24

**Control panel transformer, double wound, with earth screen for mains isolation. Easy fix frame for simple fixing. Shrouded terminal block. Full varnish impregnation.**

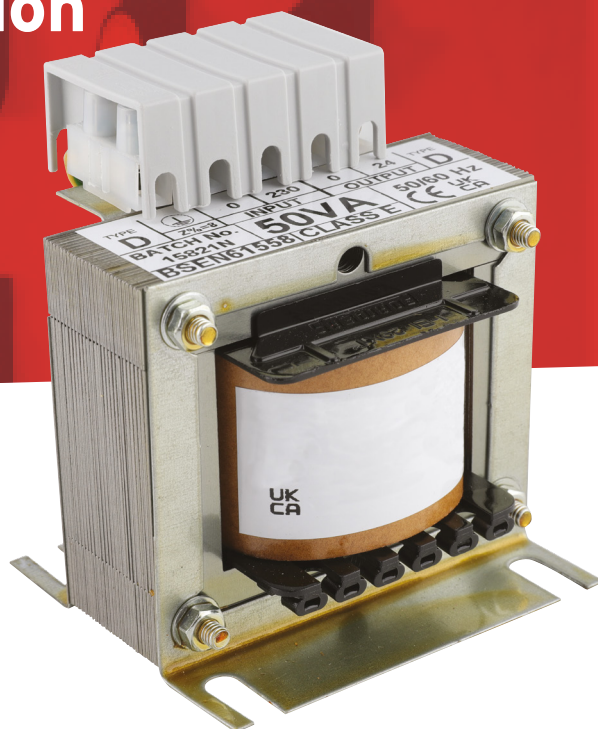

### General Characteristics

General Characteristics	
Standard	BSEN 61558
Power	50 VA
Input voltage	400V 1ph
Output voltage	24V 1ph
Duty	Continuous
Frequency	50 / 60 Hz
Isolation class	1
Insulation class	E
Ambient temperature	+21°C
Overall height	113mm
Width	40mm
Depth	40mm
Fixing centres	63x49mm
Weight	1.06 Kg

### Additional Information

**Additional information**

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.