

PROTEGO 125

10 kA Type 'A' RCBO
Protego 125
Single Pole Bi-Directional
'C' Curve



Single pole Type 'A' Bi-Directional RCBO for the Protego 125 range.

Technical Specifications

Voltage Rating	230v
Breaking Capacity	10kA
Pole	Single Pole
Standards	BS EN 61009-1


PRCBO10C1-06	'C' Curve 6A - 30mA
PRCBO10C1-10	'C' Curve 10A - 30mA
PRCBO10C1-16	'C' Curve 16A - 30mA
PRCBO10C1-20	'C' Curve 20A - 30mA
PRCBO10C1-25	'C' Curve 25A - 30mA
PRCBO10C1-32	'C' Curve 32A - 30mA
PRCBO10C1-40	'C' Curve 40A - 30mA
PRCBO10C1-50	'C' Curve 50A - 30mA

Dimensions See technical drawing

Use For use with Protego 125 boards only

MCB Characteristics See page 2

Technical Drawing

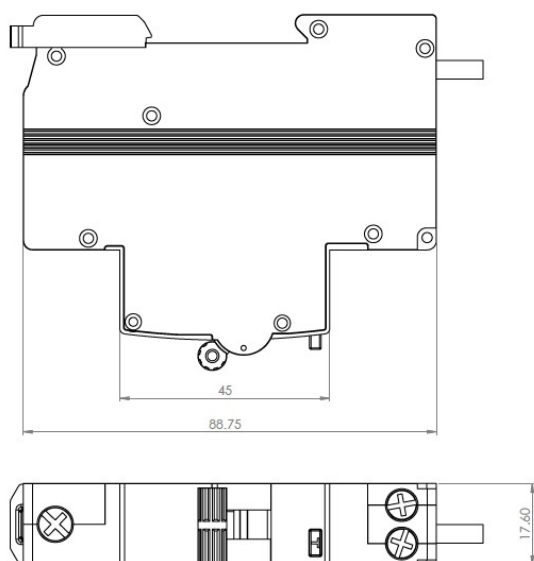

PROTEGO 125



10 kA Type 'A' RCBO
Protego 125
Single Pole Bi-Directional
'C' Curve

Product	Rated current	The max. Zs value		
		B curve	C curve	D curve
MCB/RCBO/AFDD	1 - 63A	0.69Ω	0.35Ω	0.69Ω

