

PROTEGO 125

10 kA Type 'A' RCBO Protego 125 Single Pole Bi-Directional 'D' Curve




Single pole Type 'A' Bi-Directional RCBO for the Protego 125 range.

Technical Specifications

Voltage Rating	230v
Breaking Capacity	10kA
Pole	Single Pole
Standards	BS EN 61009-1
PRCBO10D1-06	'D' Curve 6A - 30mA
PRCBO10D1-10	'D' Curve 10A - 30mA
PRCBO10D1-16	'D' Curve 16A - 30mA
PRCBO10D1-20	'D' Curve 20A - 30mA
PRCBO10D1-25	'D' Curve 25A - 30mA
PRCBO10D1-32	'D' Curve 32A - 30mA
PRCBO10D1-40	'D' Curve 40A - 30mA
PRCBO10D1-50	'D' Curve 50A - 30mA
Dimensions	See technical drawing
Use	For use with Protego 125 boards only
MCB Characteristics	See page 2

Technical Drawing

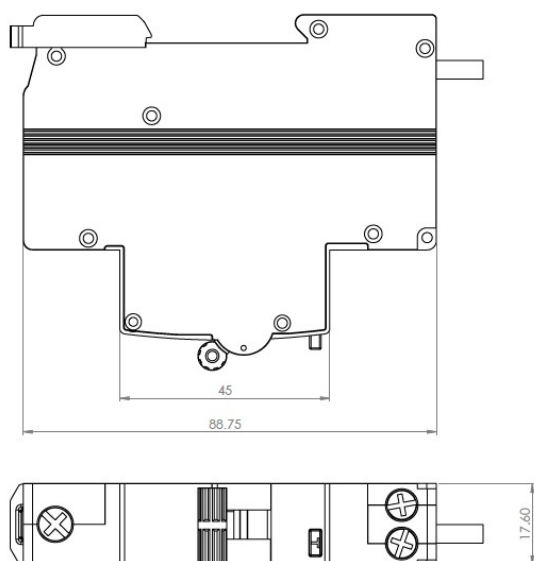

PROTEGO 125



10 kA Type 'A' RCBO
Protego 125
Single Pole Bi-Directional
'D' Curve

Product	Rated current	The max.Zs value		
		B curve	C curve	D curve
MCB/RCBO/AFDD	1 - 63A	0.69Ω	0.35Ω	0.69Ω

