

PROTEGO 125

10 kA MCB Range
Protego 125
Triple Pole
'B' Curve



Triple pole miniature circuit breakers for the Protego 125 range.


Technical Specifications

Voltage Rating	400v
Breaking Capacity	10kA
Pole	Triple Pole
Standards	BS EN 60898-1

PMCB10B3-06	'B' Curve 6A
PMCB10B3-10	'B' Curve 10A
PMCB10B3-16	'B' Curve 16A
PMCB10B3-20	'B' Curve 20A
PMCB10B3-25	'B' Curve 25A
PMCB10B3-32	'B' Curve 32A
PMCB10B3-40	'B' Curve 40A
PMCB10B3-50	'B' Curve 50A
PMCB10B3-63	'B' Curve 63A

Dimensions	See technical drawing
Use	For use with Protego 125 boards only
MCB Characteristics	See page 2

Technical Drawing

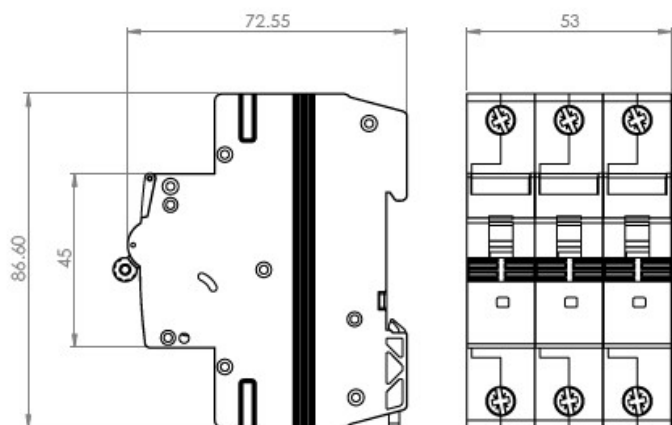

PROTEGO 125



10 kA MCB Range
Protego 125
Triple Pole
'B' Curve

Product	Rated current	The max.Zs value		
		B curve	C curve	D curve
MCB/RCBO/AFDD	1 - 63A	0.69Ω	0.35Ω	0.69Ω

