

PROTEGO 125

10 kA Type 'A' RCBO
Protego 125
Triple Pole
'B' Curve



Triple pole + switched Neutral Type 'A' RCBO for the Protego 125 range.


Technical Specifications

Voltage Rating	400v
Breaking Capacity	10kA
Pole	Triple Pole + Switched N
Standards	BS EN 61009-1

PRCBO10B3-06	'B' Curve 6A - 30mA
PRCBO10B3-10	'B' Curve 10A - 30mA
PRCBO10B3-16	'B' Curve 16A - 30mA
PRCBO10B3-20	'B' Curve 20A - 30mA
PRCBO10B3-25	'B' Curve 25A - 30mA
PRCBO10B3-32	'B' Curve 32A - 30mA
PRCBO10B3-40	'B' Curve 40A - 30mA
PRCBO10B3-50	'B' Curve 50A - 30mA

Dimensions	See technical drawing
Use	For use with Protego 125 boards only
MCB Characteristics	See page 2

Technical Drawing

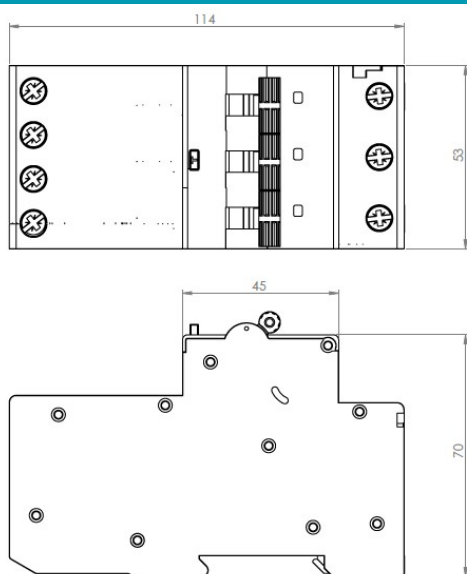

PROTEGO 125



10 kA Type 'A' RCBO
Protego 125
Triple Pole
'B' Curve

Product	Rated current	The max.Zs value		
		B curve	C curve	D curve
MCB/RCBO/AFDD	1 - 63A	0.69Ω	0.35Ω	0.69Ω

