

PROTEGO 125

10 kA MCB Range
Protego 125
Triple Pole
'C' Curve



Triple pole miniature circuit breakers for the Protego 125 range.


Technical Specifications

| | |
|-------------------|---------------|
| Voltage Rating | 400v |
| Breaking Capacity | 10kA |
| Pole | Triple Pole |
| Standards | BS EN 60898-1 |

| | |
|-------------|---------------|
| PMCB10C3-06 | 'C' Curve 6A |
| PMCB10C3-10 | 'C' Curve 10A |
| PMCB10C3-16 | 'C' Curve 16A |
| PMCB10C3-20 | 'C' Curve 20A |
| PMCB10C3-25 | 'C' Curve 25A |
| PMCB10C3-32 | 'C' Curve 32A |
| PMCB10C3-40 | 'C' Curve 40A |
| PMCB10C3-50 | 'C' Curve 50A |
| PMCB10C3-63 | 'C' Curve 63A |

| | |
|---------------------|--------------------------------------|
| Dimensions | See technical drawing |
| Use | For use with Protego 125 boards only |
| MCB Characteristics | See page 2 |

Technical Drawing

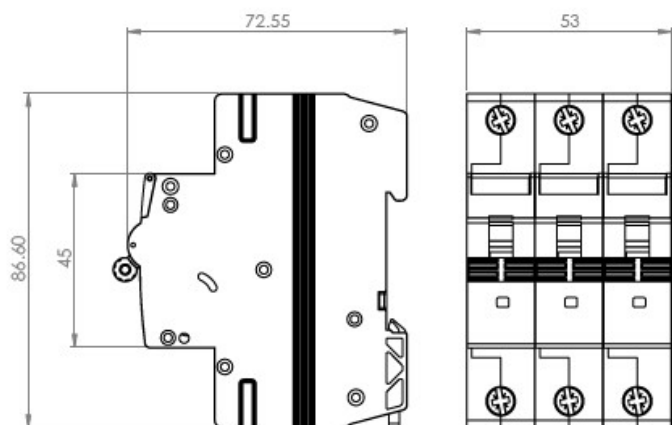

PROTEGO 125



10 kA MCB Range
Protego 125
Triple Pole
'C' Curve

| Product | Rated current | The max.Zs value | | |
|---------------|---------------|------------------|---------|---------|
| | | B curve | C curve | D curve |
| MCB/RCBO/AFDD | 1 - 63A | 0.69Ω | 0.35Ω | 0.69Ω |

