

# PROTEGO 125

10 kA Type 'A' RCBO  
Protego 125  
Triple Pole  
'C' Curve



Triple pole + switched Neutral Type 'A' RCBO for the Protego 125 range.


### Technical Specifications

Voltage Rating	400v
Breaking Capacity	10kA
Pole	Triple Pole + Switched N
Standards	BS EN 61009-1

PRCBO10C3-06	'C' Curve 6A - 30mA
PRCBO10C3-10	'C' Curve 10A - 30mA
PRCBO10C3-16	'C' Curve 16A - 30mA
PRCBO10C3-20	'C' Curve 20A - 30mA
PRCBO10C3-25	'C' Curve 25A - 30mA
PRCBO10C3-32	'C' Curve 32A - 30mA
PRCBO10C3-40	'C' Curve 40A - 30mA
PRCBO10C3-50	'C' Curve 50A - 30mA

Dimensions	See technical drawing
Use	For use with Protego 125 boards only
MCB Characteristics	See page 2

### Technical Drawing

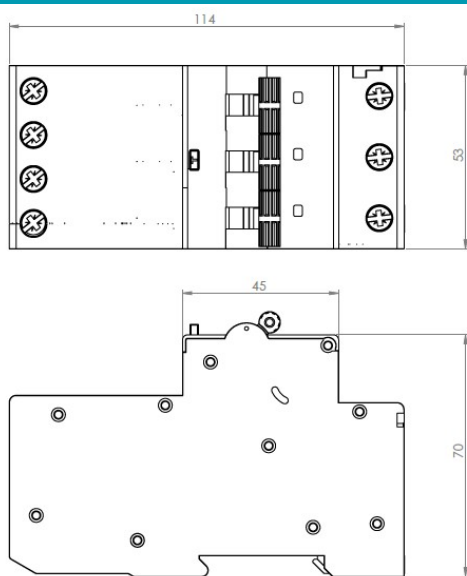

### PROTEGO 125



10 kA Type 'A' RCBO  
Protego 125  
Triple Pole  
'C' Curve

Product	Rated current	The max.Zs value		
		B curve	C curve	D curve
MCB/RCBO/AFDD	1 - 63A	0.69Ω	0.35Ω	0.69Ω

