

# niGLON™


## Circuit Protection

### RCBO1-50/30SA2

A Type Switched Line &  
Solid Neutral Bi-Directional  
RCBO



#### Technical Drawing

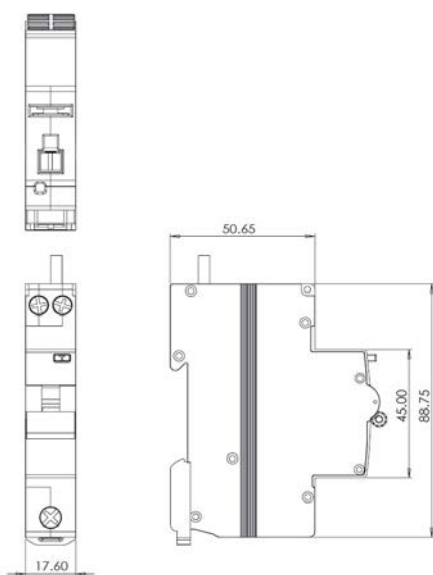

#### Technical Specifications

Rated Voltage	240V
Rated Current	50A
RCD Type	A
Tripping Curve	B
Breaking Capacity	10kA
Rated trip current	30mA
Cable capacity	L=25mm <sup>2</sup> , L/N=10mm <sup>2</sup>
Space Saver	Yes
Torque Rating	L=2.5Nm, L/N=1.5Nm
Bi-directional	Yes
Switching	Switched Line & Solid Neutral
Standards	BS EN 610098-1, IEC 61009-2-2
Certification	Semko, Intertek
RCD	Type A